



HAARSLEV™

Processing Technology


FAT
SCREW PRESS

Product brochure



HAARSLEV™
Processing Technology

FAT SCREW PRESS

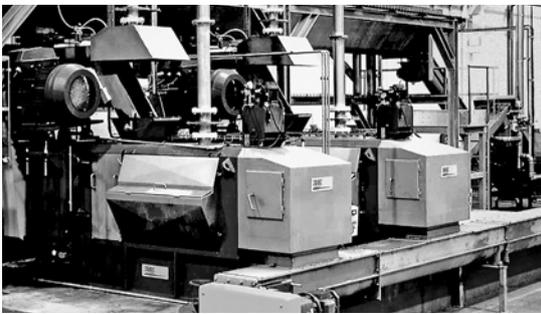

The Haarslev Fat Screw Press provides highly effective mechanical extraction of the fat content from cooked and dried animal and poultry by-products, in a continuous flow. This enables you to achieve a hard cake with a low fat content.

As the greaves pass along the single conical screw, the fat is pressed out into the surrounding enclosure, and the greaves are discharged as press cake. The fat (along with any solids – often known as fines) runs into a collector trough, where a screw moves it to the outlet.

These solidly built units are simple but effective, ensuring maximum reliability and low service and maintenance costs. Two different models are currently available:

- Shorter ST model with hydraulically adjustable choke in the outlet
- Longer, high-capacity HM model with fewer moving parts and no choke in the outlet

“
FOR CONTINUOUS
PRESSING OF FAT FROM
COOKED AND DRIED
ANIMAL AND POULTRY BY-
PRODUCTS (OFTEN KNOWN
AS GREAVES).”




APPLICABLE FOR:

- Haarslev fat screw presses are normally installed as an integral part of a high-temperature dry rendering process.

BENEFITS

- High compression rate ensures efficient continuous fat extraction
- Rugged and reliable equipment, with a long service life
- Low maintenance costs

COOKER

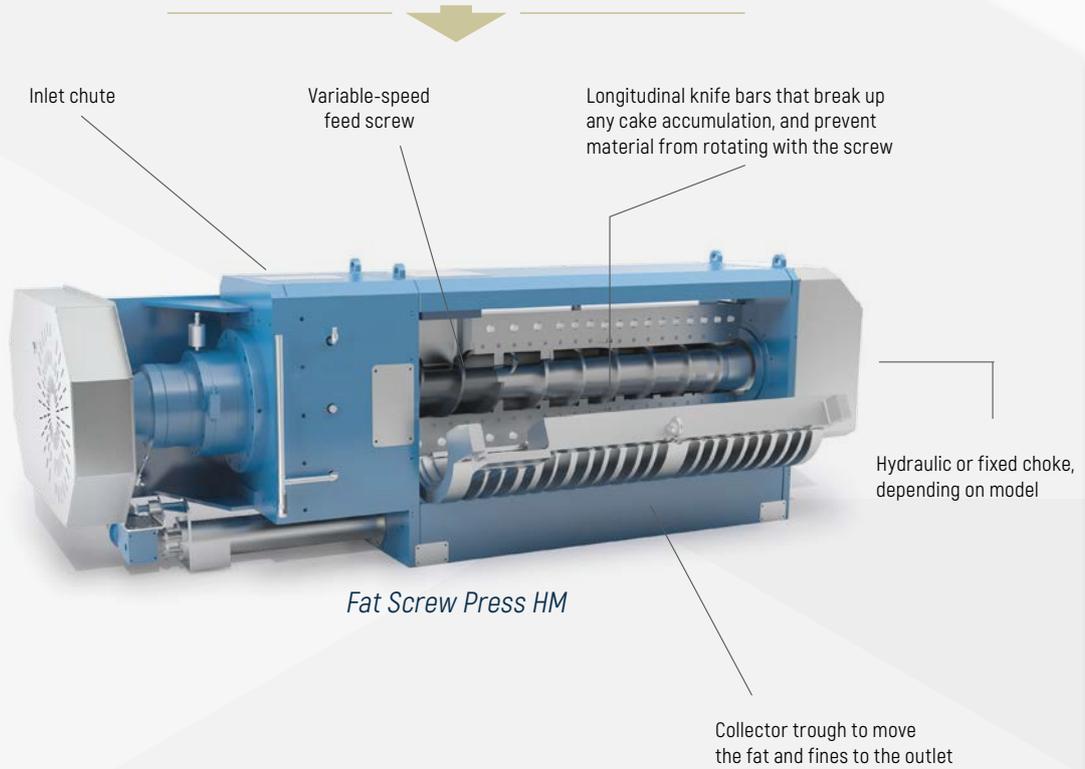

MILLING AND REFINING



TYPE	OUTPUT (CAKE) (kg/h)/(lb/h)		RESIDUAL FAT IN CAKE (%)	POWER (kW)/(hp)		WEIGHT APPROX. (kg) / (lb)		DIMENSIONS* (mm)/(ft.inch)					
								Length (L)		Height (H)		Width (W)	
ST 500	280 - 350	600 - 800	9 - 14	22	30	2,300	5,000	2,950	9' 9"	1,350	4' 6"	1,200	4' 0"
ST 1000	560 - 700	1,200 - 1,500	9 - 14	45	60	4,000	9,000	3,170	10' 5"	1,720	5' 8"	1,600	5' 3"
ST 1750	980 - 1260	2,200 - 2,800	9 - 14	75 - 90	100-125	6,400	14,100	3,340	11' 0"	2,100	6' 11"	2,160	7' 2"
ST 2500	1,400 - 1,750	3,000 - 4,000	9 - 14	75 - 90	100-125	6,900	15,200	3,990	13' 2"	2,210	7' 4"	1,800	5' 11"
ST 4500	1,800 - 2,800	5,400 - 6,000	9 - 14	90 - 132	125 - 200	10,500	23,200	4,270	14' 1"	2,620	8' 8"	1,960	6' 6"
HM 3000	2,800 - 3,500	6,175-7,715	9 - 14	110	150	11,500	25,353	4,680	15' 5"	1,580	5' 3"	2,040	6' 9"
HM6000	5,600 - 6,900	12,345-15,210	9 - 14	200	300	22,000	48,501	6,544	21' 6"	2,065	6' 10"	2,780	9' 2"


* All statements of dimensions are approximate.

We reserve the right to alter the specifications at any time without prior notice.



HAARSLEV™

Processing Technology

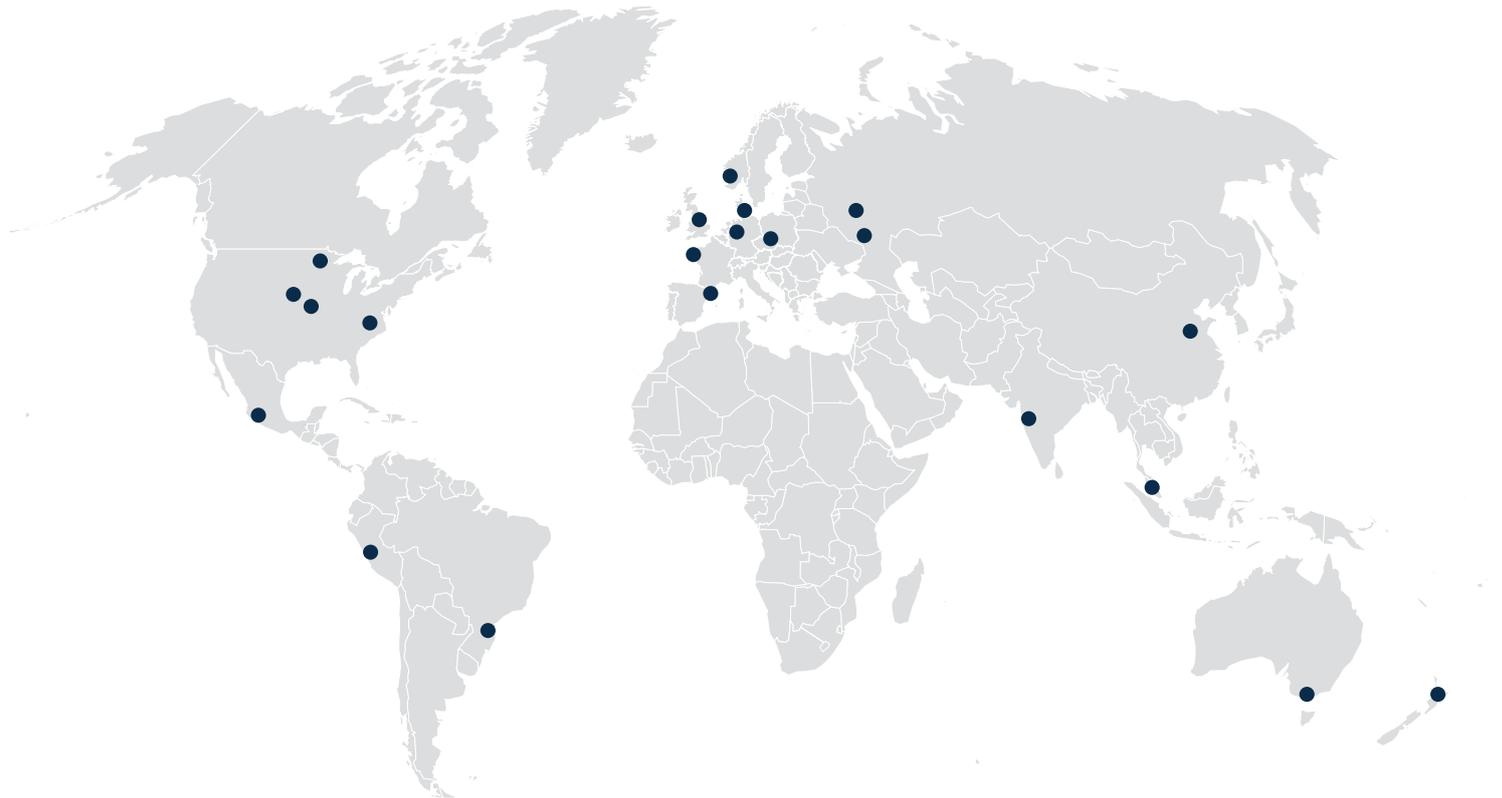

PROCESS IS POTENTIAL

HEAD OFFICE

Haarslev Industries A/S · Bogensevej 85
DK-5471 Sønderlø · Denmark
Telephone: +45 63 83 11 00
Email: info@haarslev.com
www.haarslev.com

GLOBAL EXPERIENCE - LOCAL PRESENCE

Please contact us or visit our website
to locate the closest sales office.